


## DECORATION WIRING DUCT.

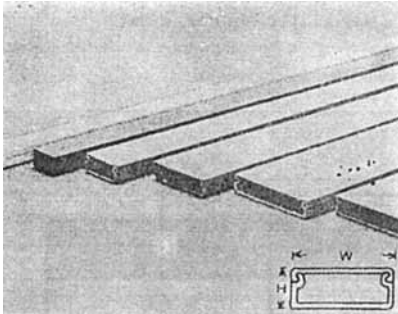


- ◆ Material : Rigid, self-extinguishing P.V.C.
- ◆ Standard colour : Grey, (Milk, White, Brown available upon request to meet your colour system.)
- ◆ Features : All size feature same height in 11 mm which were specially designed for flat cables.
- ◆ Application : Used extensively for electric wire application of indoor decoration or outdoor security, alarm system.

มีสีเทา ขาว ครีมน

ITEM NO.	PACKING	Overall Length	Width (m.m.)	Height (m.m.)	Price ราคา/เส้น
TE-1	340	2 M	12.7 (1/2")	11	@ 36.-
TE-2	200	2 M	19.1 (3/4")	11	@ 48.-
TE-3	170	2 M	25.4 (1")	11	@ 54.-
TE-4	130	2 M	31.8 (1 1/4")	11	@ 60.-
TE-5	110	2 M	38.1 (1 1/2")	11	@ 70.-
TE-6	80	2 M	50.8 (2")	11	@ 90.-


## TELEPHONE WIRING DUCT (SELF-ADHESIVE)

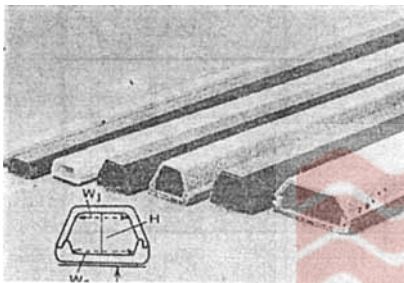



- ◆ Material : Rigid, self-extinguishing P.V.C.
- ◆ Backed with high quality self-adhesive tape to facilitate wire application.
- ◆ colour : Grey, (Milk, White, Brown available on request)
- ◆ Length : 2 M
- ◆ Application : Designed to protect wire on floor.

มีสีเทา ขาว ครีมน


ITEM NO.	PACKING 1 M	PACKING 2 M	DIMENSION			Wire to be Contained	Price ราคา/เส้น	
			W1	W2	H		1 M	2M
TP-1	100	350	6	7	4	1 pcs	15.-	@ 30.-
TP-1.5	80	200	-	-	-	3-4 pcs	-	-
TP-2	55	190	8	8	6	3 pcs	21.-	@ 42.-
TP-3	45	140	10	10	10	3-4 pcs	27.-	@ 54.-
TP-4	60	90	12	15	13	4-7 pcs	34.-	@ 68.-
TP-5	50	75	10	17	16	7-9 pcs	37.-	@ 74.-
TP-6	40	60	11	19	16	10-15 pcs	47.-	@ 94.-
TP-8	30	32	30	37	16	30-40 pcs	115.-	@ 230.-

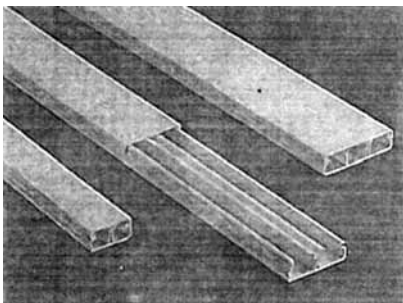

Item No.	Length	W (m.m.)	W1	W2	W3	H	PACKING	Price ราคา/เส้น
WD-2010-2	2 M	20.0	7.5	7.5		10.3	260	@ 142.-
WD-3010-2		30.0	12.5	12.5		11.2	150	@ 167.-
WD-4010-3		40.0	11	11.5	11.5	10.3	130	@ 234.-

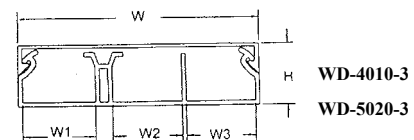



# BANDEX WIRING DUCT

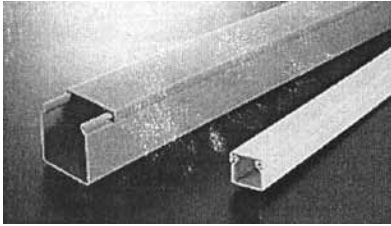

- SD-100100J/SD-150100J/SD-300100J is thickner wall type design.
- SD-600100 please reference the structure design of SDH-600100

Item No.	W x H (mm)	Thickness (mm)	Wires to be contained	Length (mm)	Price
SD-15060	150 x 60	2.2±0.3MM	310~480pcs	2M	@ 1,700.-
SD-150100	150 x 100	2.6±0.3MM	450~600pcs		@ 2,600.-
SD-200100	200 x 100	2.6±0.3MM	600~800pcs		@ 4,500.-
SD-200150	200 x 150	3.6±0.4MM	1040~1200pcs		@ 5,700.-
SD-200200	200 x 200	3.6±0.4MM	1200~1600pcs		@ 6,000.-
SD-300100	300 x 100	4.0±0.4MM	1040~1200pcs		@ 6,400.-
SD-400100	400 x 100	5±0.5MM	1380~1600pcs		@ 9,000.-
SD-600100	600 x 100	5±0.5MM	2080~2400pcs		@ 10,400.-

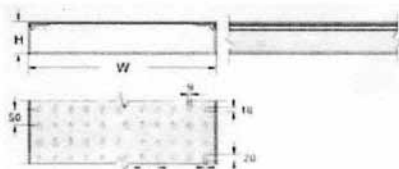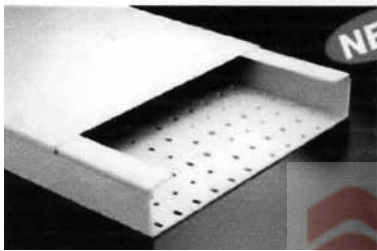


Item No.	W x H (mm)	Thickness (mm)	Wires to be contained	Length (mm)	Price
SDH-15060	150 x 60	2±0.3MM	310~480pce	2M	@ 2,000.-
SDH-200100	200 x 100	2.6±0.4MM	600~800pce		@ 4,700.-
SDH-300100J	300 x 100	5±0.5MM	1040~1200pcs		@ 6,400.-
SDH-400100	400 x 100	5±0.5MM	1380~1600pcs		@ 9,000.-
SDH-600100	600 x 100	5±0.5MM	2080~2400pcs		@ 10,400.-

材 質：UL合格之南亞PVC（灰色），防火等級94V-0，耐燃，絕緣性良好，不自燃，耐溫至85℃




特 點：1.專業溝槽及底孔設計，配合專業L型連接片使用，能強化配線槽連接處，平穩美觀、施工快速方便。

2.配線槽底部沖孔設計，能將電線產生的溫度，均勻且快速的散熱。適合大型工程配線使用。

※ 任何密封型配線槽，均可訂製沖孔型配線槽。

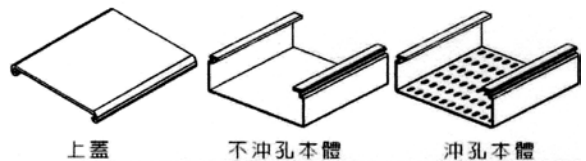

# BANDEX WIRING DUCT COUPLER





型號 Item No.	A	B	適用線槽
DCPT1	190	58.5	高度60mm以上的配線槽都適用

材 質：高UL合格之ABS（灰色），防火等級94HB

用途：連接二組不同線槽作90度等轉彎連接用。


※ 搭配塑膠螺絲PF-823HNGYJ、塑膠螺帽PN-8HNGYJ固定用

## BANDEX T TYPE WIRING DUCT CONNECTOR

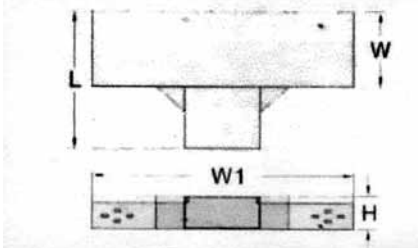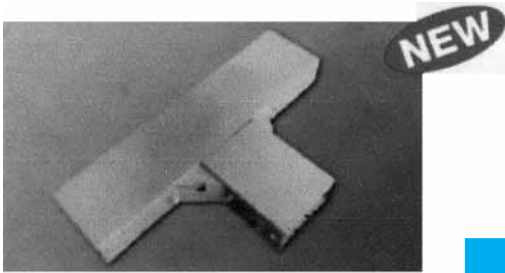



Item No.	L	W	W1	H		PRICE
SDHT-20100	475	200	850	100	SDH-200100	@ 6,350.-
SDHT-300100J					SDH-300100J	@ 12,600.-
SDHT-400100					SDH-400100	@ 13,800.-
SDHT-600100					SDH-600100	@ 21,000.-

## L TYPE WIRING DUCT CONNECTOR

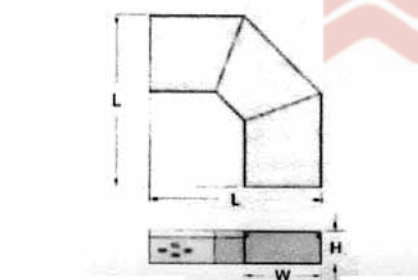


Item No.	L	W	W1	H		PRICE
SDHL-20100	510	200	100	100	SDH-200100	@ 4,980.-
SDHL-300100J					SDH-300100J	@ 9,960.-
SDHL-400100					SDH-400100	@ 12,600.-
SDHL-600100					SDH-600100	@ 21,000.-

## END PIECE WIRING DUCT CONNECTOR

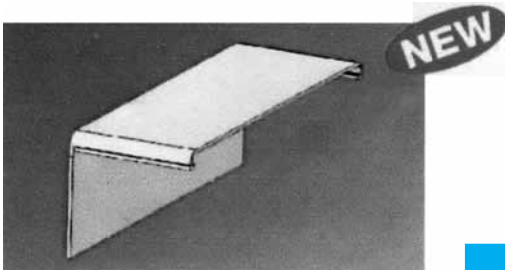


Item No.	L	W	H		PRICE
SDE-20100	105	200	105	SDH-200100	-


材 質：UL合格之南亞PVC（灰色），防火等級94V-0，耐燃，絕緣性良好，不自燃，耐溫至85℃

**45°****Downward Connector 45°**


Item No.		PRICE
SDHA200100	SDH200100	@ 3,440.-
SDHA300100J	SDH300100J	@ 6,360.-
SDHA400100	SDH400100	@ 7,400.-
SDHA600100	SDH600100	@ 10,500.-

**90°****Downward Connector 90°**


Item No.		PRICE
SDHO200100	SDH200100	@ 6,360.-
SDHO300100J	SDH300100J	@ 9,450.-
SDHO400100	SDH400100	@ 11,000.-
SDHO600100	SDH600100	@ 16,900.-

**45°****Upward Connector 45°**


Item No.		PRICE
SDHV200100	SDH200100	@ 3,440.-
SDHV300100J	SDH300100J	@ 6,360.-
SDHV400100	SDH400100	@ 7,400.-
SDHV600100	SDH600100	@ 10,500.-

**90°****Upward Connector 90°**


Item No.		PRICE
SDHI200100	SDH200100	@ 5,840.-
SDHI300100J	SDH300100J	@ 10,300.-
SDHI400100	SDH400100	@ 11000.-
SDHI600100	SDH600100	@ 16,900.-

**45°****Connector "L" Type 45°**


Item No.		PRICE
SDHF200100	SDH200100	@ 3,600.-
SDHF300100J	SDH300100J	@ 7,400.-
SDHF400100	SDH400100	@ 9,960.-
SDHF600100	SDH600100	@ 16,900.-

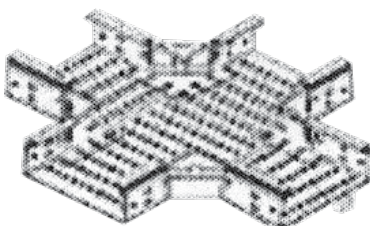**Connector "X" Type**


Item No.		PRICE
SDHX200100	SDH200100	@ 8,420.-
SDHX300100J	SDH300100J	@ 16,300.-
SDHX400100	SDH400100	@ 19,900.-
SDHX600100	SDH600100	@ 30,800.-

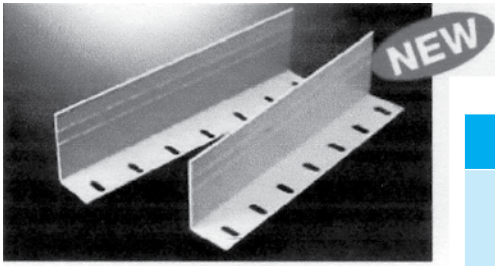


Item No.	A	B	L		PRICE
<b>DCP-100</b>	40.5	75.5	350	SDH-300100T SDH-400100 SDH-500100	@ 220.-

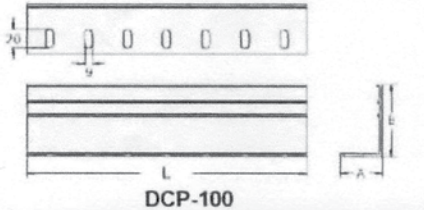

材 質：UL合格之南亞PVC（灰色），防火等級94V-0，耐燃，絕緣性良好，不自燃，耐溫至85℃  
 ※搭配塑膠螺絲PF-823HNGYJ，塑膠螺帽PN-8HNGYJ固定用

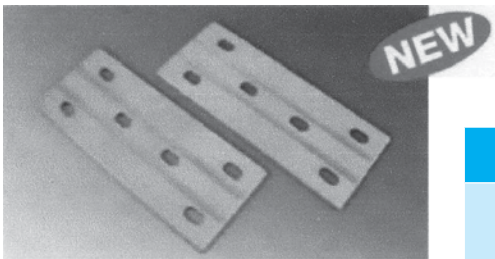


Item No.	A	B		PRICE
<b>DCP-100A</b>	184.6	75	100 mm	-

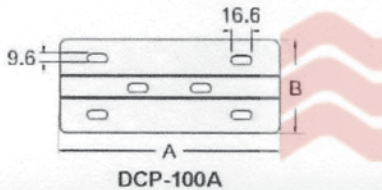


材 質：DCP-100A為UL合格之ABS（灰色），防火等級94HB  
 ※搭配塑膠螺絲PF-823HNGYJ，塑膠螺帽PN-8HNGYJ固定用



## PLASTIC FASTENERS

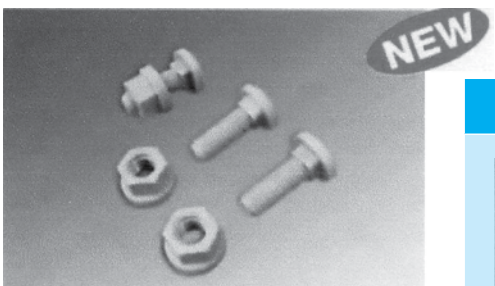

	Item No.	A	B	C	D	PACKING	PRICE
<b>SCREW</b>	<b>PF-823HNGYJ</b>	M8 x 1.25	22.5	5.5	15.8	100PCS	@ 9.-
<b>NUT</b>	<b>PN-8HNGYJ</b>	M8 x 1.25	14.6	10	12.8	100PCS	@ 6.-



材質：PC(POLYCARBONATE)或NYLON 66  
 用途：PC板、機板及其他器具固定用。  
 特點：絕緣性良好，不生鏽、不腐蝕，重量輕