

Compact Enclosures - "DS-S" Series

DENCO



Features

Protection against water spray by special rain canopy. These features provided optimum protection for the installed equipments inside enclosures.

Suitable for outdoor installation.

Specification

Material for Enclosure	Stainless Sheet Steel 1.5 mm. All Enclosure
Surface finish	Brushed

Major Applications

Water spray environments
Food-Beverage processing equipment
Controlling waste water treatment system
Lighting systems for Billboard or Cut-Out


Protection Category

IP 45

Technical Data

- Rubber seal around rain gutter
- Internal mounting plate 1.5 mm.
- Fixing earth stud included
- Rain canopy against water and UV radiation
- Bottom gland plate for cable incoming
- Single door type

"DS-S" Model Structure:

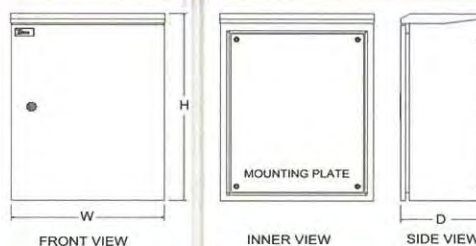

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DS-S-01	280	350	150	6,000
DS-S-02	300	450	150	7,200
DS-S-03	350	450	150	7,800
DS-S-04	300	450	200	8,500
DS-S-05	350	450	200	9,200
DS-S-06	350	500	200	10,000
DS-S-07	400	500	200	10,700
DS-S-08	450	600	200	11,500
DS-S-09	450	600	250	12,000
DS-S-10	500	600	200	12,900
DS-S-11	500	600	250	13,500
DS-S-12	550	700	250	14,200
DS-S-13	630	750	250	15,000
DS-S-14	630	900	250	15,800
DS-S-15	600	1100	250	17,000
DS-S-16	700	1100	250	18,500
DS-S-17	800	1200	250	20,000
DS-S-18	900	1200	250	21,500
DS-S-19	800	1200	300	23,000
DS-S-20	900	1200	300	25,000

Compact Enclosures - "DSS-S" Series



Features

Protection against water spray by special rain canopy. These features provided optimum protection for the installed equipments inside enclosures.

Suitable for outdoor installation.

Specification

Material for Enclosure	Stainless Sheet Steel 1.5 mm. All Enclosure
Surface finish	Brushed

Major Applications

- Water spray environments
- Food-Beverage processing equipment
- Controlling waste water treatment system
- Outdoor sport stadium


Protection Category

IP 45

Technical Data

- Rubber seal around rain gutter
- Internal mounting plate 1.5 mm.
- Fixing earth stud included
- Rain canopy against water and UV radiation
- Bottom gland plate for cable incoming
- Double door type

"DSS-S" Model Structure:

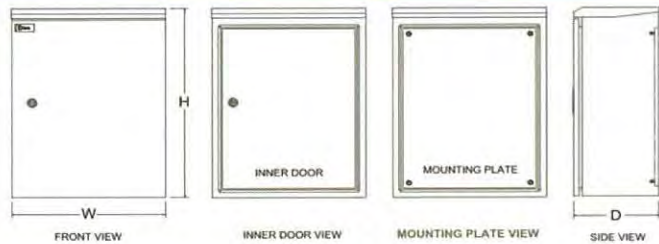

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSS-S-01	280	350	150	6,800
DSS-S-02	300	450	150	7,800
DSS-S-03	350	450	150	8,500
DSS-S-04	300	450	200	9,200
DSS-S-05	350	450	200	10,000
DSS-S-06	350	500	200	10,700
DSS-S-07	400	500	200	11,500
DSS-S-08	450	600	200	12,900
DSS-S-09	450	600	250	13,500
DSS-S-10	500	600	200	14,200
DSS-S-11	500	600	250	15,000
DSS-S-12	550	700	250	15,800
DSS-S-13	630	750	250	16,500
DSS-S-14	630	900	250	17,000
DSS-S-15	600	1100	250	18,500
DSS-S-16	700	1100	250	20,000
DSS-S-17	800	1200	250	21,500
DSS-S-18	900	1200	250	23,000
DSS-S-19	800	1200	300	24,500
DSS-S-20	900	1200	300	26,000

Compact Enclosures - "DSG-S" Series

DENCO



Features

Protection against water spray by special rain canopy. These features provided optimum protection for the installed equipments inside enclosures.

Suitable for outdoor installation.

Specification

Material for Enclosure	Stainless Sheet Steel 1.5 mm. All Enclosure
Surface finish	Brushed

Major Applications

Water spray environments

Food-Beverage processing equipment

Controlling waste water treatment system

Outdoor sport stadium


Protection Category

IP 45

Technical Data

- Rubber seal around rain gutter
- Internal mounting plate 1.5 mm.
- Fixing earth stud included
- Rain canopy against water and UV radiation
- Bottom gland plate for cable incoming
- Double door type, Viewing window

"DSG-S" Model Structure:

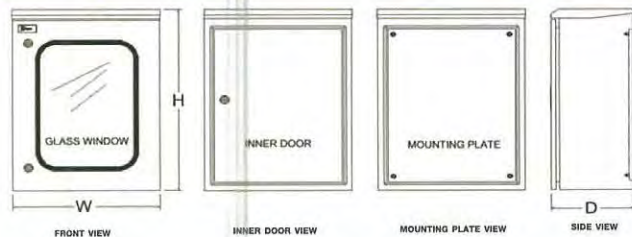

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSG-S-01	280	350	150	7,200
DSG-S-02	300	450	150	8,500
DSG-S-03	350	450	150	9,200
DSG-S-04	300	450	200	10,000
DSG-S-05	350	450	200	10,700
DSG-S-06	350	500	200	11,500
DSG-S-07	400	500	200	12,000
DSG-S-08	450	600	200	13,500
DSG-S-09	450	600	250	14,200
DSG-S-10	500	600	200	15,000
DSG-S-11	500	600	250	15,800
DSG-S-12	550	700	250	16,500
DSG-S-13	630	750	250	17,000
DSG-S-14	630	900	250	18,000
DSG-S-15	600	1100	250	19,000
DSG-S-16	700	1100	250	20,500
DSG-S-17	800	1200	250	22,000
DSG-S-18	900	1200	250	23,500
DSG-S-19	800	1200	300	25,500
DSG-S-20	900	1200	300	27,500