


1

SAKOL GROUP


PHELPS DODGE CONDUCTOR TYPE PD-VAF (MEA TYPE B)
300 V 70°C PVC INSULATED AND SHEATHED FLAT TYPE,
TWO CORE

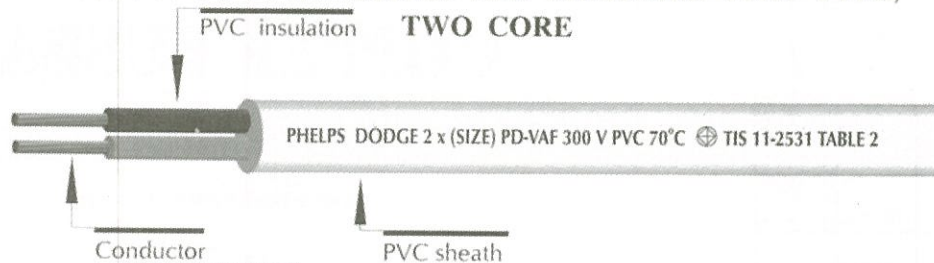

Construction

- Conductor : Annealed copper, solid or stranded
 Sizes 0.5 mm² up to 35 mm²
- Insulation : Heat resistance polyvinyl chloride (Gray and Black colour)
- Sheath : Heat resistance polyvinyl chloride (White colour)

SAKOL GROUP

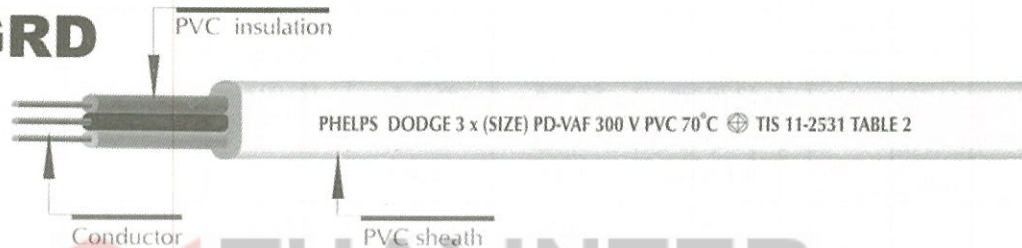

Construction

- Conductor : Annealed copper, solid or stranded
 Sizes 0.5 mm² up to 16 mm²
- Insulation : Heat resistance polyvinyl chloride (Gray, Black and Red colour)
- Sheath : Heat resistance polyvinyl chloride (White colour)

SAKOL GROUP

300 V 70 C INSULATED AND SHEATHE , FLATTYPE WITH GROUND

สายแบนแกนคู่ และ สายแบนแกนคู่มีสายดิน หุ้มด้วยฉนวนและเปลือกนอก พี.วี.ซี.

แรงดัน 300 โวลท์ อุณหภูมิ 70 ข.

ขนาดพื้นที่หน้าตัด (ตร.มม.)	FUHRER / BANGKOK		YAZAKI	
2C	VAF	VAF/G	VAF	VAF/G
0.5	300	-	2.75	-
1	465	13.05	4.30	13.40
1.5	660	16.93	6.10	17.40
2.5	1,005	23.49	9.70	24.20
4	1,540	33.76	15.40	34.80
6	2,270	47.11	22.70	52.30
10	3,500	65.95	35.00	73.20
16	5,245	101.29	52.00	112.50
25	-	145.24	-	161.30
35	-	201.40	-	223.70